

B+G AVENUE PLINTH BENCH

Seating » Benches



Collection: **Avenue**

B+G AVENUE PLINTH BENCH

Seating » Benches



Hardwood Australian
Eucalyptus Light Oil



Hardwood Australian
Eucalyptus Dark Oil



Duraslat™ Plateau



Duraslat™ Summit



Duraslat™ Canyon



Duraslat™ Outback



Core Powder-Coat
Coreten Textured



Core Powder-Coat
Charcoal Satin



Core Powder-Coat
Silver Pearl Satin
Metallic



Core Powder-Coat
Black Satin



Core Powder-Coat
White Satin



Core Powder-Coat
Bronze Satin Metallic



Signature Powder-
Coat Deep Ocean
Satin



Signature Powder-
Coat Wedgewood
Satin



Signature Powder-
Coat Mangrove Satin



Signature Powder-
Coat Territory Red
Matt



Signature Powder-
Coat Claypot Satin



Signature Powder-
Coat Paperbark Satin



Bold Powder-Coat
Sky Blue Satin



Bold Powder-Coat
Yellow Green Satin




Bold Powder-Coat
Pure Orange Satin



Bold Powder-Coat
Carmine Red Satin




Bold Powder-Coat
Zinc Yellow Satin



B+G AVENUE PLINTH BENCH

Seating » Benches

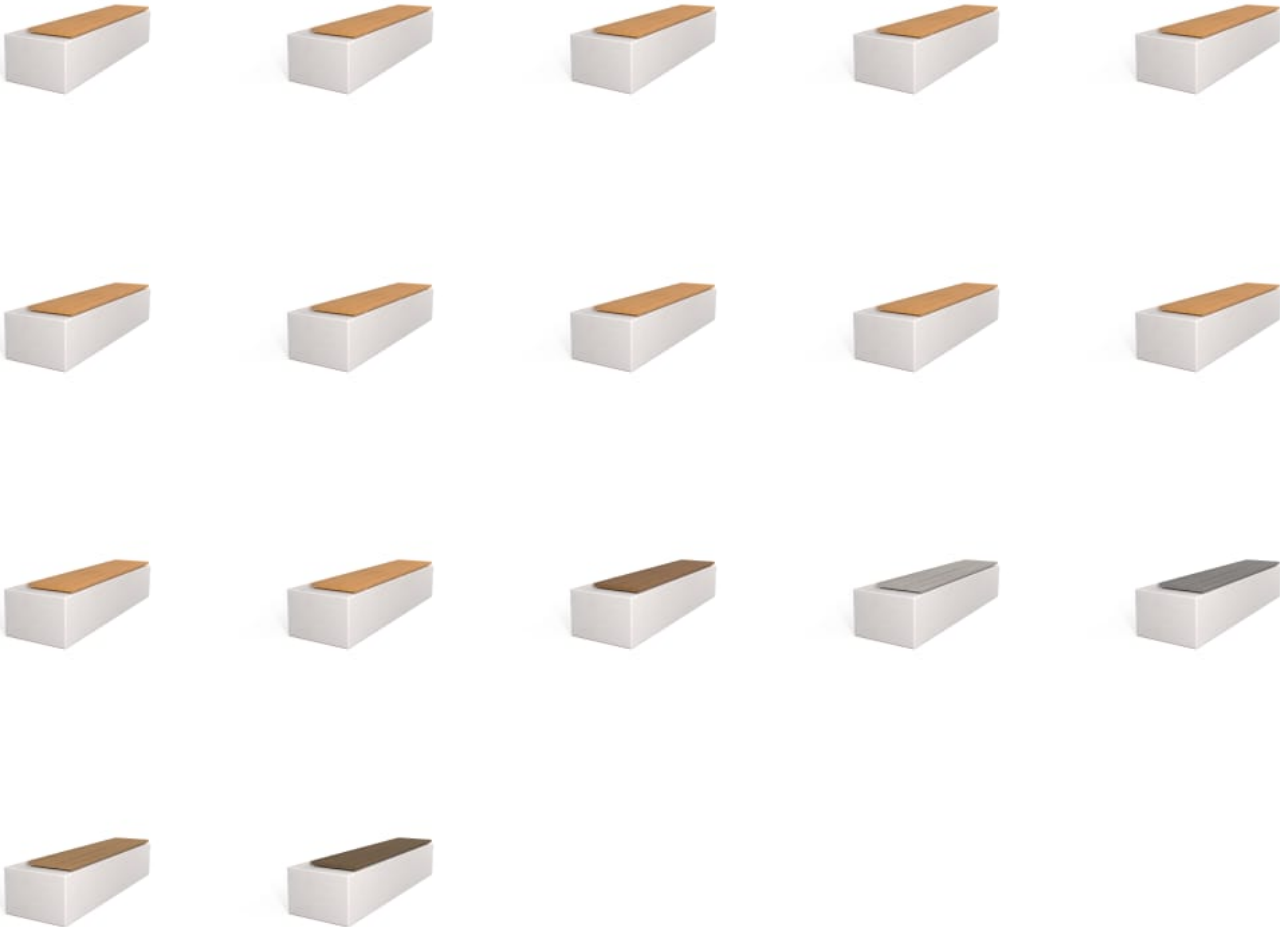

B+G AVENUE PLINTH BENCH

Seating » Benches

Modern wall-mounted bench design. Batten top in 2 hardwood or 4 Duraslat™ colors with a steel frame in 17 powder-coat or galvanized finishes.

Description Rectangular battens and a steel frame combine to deliver a modern wall-mounted plinth bench design that takes its cues from 20th century industrial design. The functional feel and light appearance of the Avenue plinth bench complements and sits within most public spaces. Finishes include 2 Australian Eucalyptus hardwood or 4 Duraslat™ colors and 17 powder-coat finishes or a galvanized finish.

Sustainability

Certified Hardwood
Australian Eucalyptus hardwood is sourced from sustainable forests certified by the Program for the Endorsement of Forest Certification (PEFC), the world's largest forestry certification system.

Material Alternatives
We offer sustainable alternatives to hardwood, such as Duraslat™; a mineral-based composite material that contains no Volatile Organic Compounds (VOCs) and is engineered using up to 46% natural filler that is based on a renewable mineral.

Recycled Materials
We locally source our steel. It means we know it uses recycled content and is 100% recyclable.

Low Pollutants
Our powder-coating process doesn't emit VOCs and has Environmental Product Declarations (EPDs) that enable projects to qualify for LEED credits.

Powder Coat

Core
Coreten (textured), Charcoal (satin), Silver Pearl (satin metallic), Black (satin), White (satin), Bronze (satin metallic)

Signature
Deep Ocean (satin), Wedgewood (satin), Mangrove (satin), Territory Red (matt), Claypot (satin), Paperbark (satin)

Bold
Sky Blue (satin), Yellow Green (satin), Pure Orange (satin), Carmine Red (satin), Zinc Yellow (satin)

B+G AVENUE PLINTH BENCH

Seating » Benches

Dimensions	Hardwood
	71"W x 17"D x 2"H (1800mmW x 435mmD x 45mmH)
	83"W x 17"D x 2"H (2100mmW x 435mmD x 45mmH)
	Duraslat™
	71"W x 17"D x 2"H (1800mmW x 435mmD x 40mmH)
	83"W x 17"D x 2"H (2100mmW x 435mmD x 40mmH)
	1.2" (30mm) thick hardwood battens Recommended installed seat height: 18" (450mm)

Batten Type	Hardwood Australian Eucalyptus
	Duraslat™ Plateau, Summit, Canyon, Outback

Frame	Powder-coated or galvanized steel
-------	-----------------------------------

Weight	Hardwood
	71"W
	62lbs (28kg)
	83"W
	75lbs (34kg)
	Duraslat™
	71"W
	51lbs (23kg)
	83"W
	61lbs (28kg)

Made In	USA
---------	-----

Lead Time	6-8 weeks
-----------	-----------

Assembly & Delivery	Shipped fully assembled on pallets.
---------------------	-------------------------------------

Fixing Detail	Fixed to existing plinth by others. Anchors not included.
---------------	---

B+G AVENUE PLINTH BENCH

Seating » Benches

Care Instructions

Hardwood

Cleaning

Remove any loose surface deposits with a soft bristled brush and wipe down with fresh water and a non-abrasive cloth.

Oiling

Oiling of timber will postpone natural greying, repel moisture, improve mould resistance, help maintain a smooth surface texture and enhance the grain and colour.

To maintain, lightly sand rough areas of timber and brush on one coat of timber decking oil every 6 months or as required.

Duraslat™

Cleaning

Clean with mild soap and water and use a soft brush to remove any dirt build-up.

Powder-Coat

Cleaning

Carefully remove any loose surface deposits with a wet sponge or soft bristled brush.

Use a soft (non-abrasive) cloth or brush and a diluted solution of mild detergent and warm water.

Ensure surfaces are thoroughly rinsed with clean fresh water after cleaning to remove all residues.

Never use thinners, abrasive cleaning agents, alcohol-based, acid or alkali cleaning agents.

Warranty

5-year warranty. View the [warranty](#) for more details.

Additional Comments

Hardwood is treated with a UV-resistant oil finish in a light or dark tone.

How to Specify

Select your length
Select your batten finish
Select your frame finish
Select your fixing type
